

FICHA DE PRODUCTO - TECHNICAL SHEET - FEUILLE TECHNIQUE

BOQUILLAS PERFIL "A"

BOQUILLA RÁPIDA MACHO "A" / MALE AIR FITTING "A"



2.405.202

5 UNIDAD MINIMA EMBALAJE

Código	Ø	CH	I	H	H1	H2	D2	D1
2.405.202	M 1/4"	14	8.3	37	15	5	12	10
2.405.203	M 3/8"	14	8.3	37	15	5	12	10
2.405.204	M 1/2"	-	-	-	-	-	-	-


→ Acoplamiento rápido perfil alemania macho./ Quick coupling male germany profile.

PERFIL
A

BOQUILLA RÁPIDA HEMBRA "A" / FEMALE AIR FITTING "A"



2.405.212



5 UNIDAD MINIMA EMBALAJE


Código	Ø	CH	I	H	H1	H2	D2	D1
2.405.212	H 1/4"	14	8.3	37	15	5	12	10
2.405.213	H 3/8"	14	8.3	37	15	5	12	10
2.405.214	H 1/2"	14	8.4	37	15	5	12	10

→ Acoplamiento rápido perfil alemania hembra./ Quick coupling female germany profile.

BOQUILLA RÁPIDA "A" ESIPIGA RÁPIDA/ QUICK NOZZLE "A" QUICK SPIKE



2.405.221



5 UNIDAD MINIMA EMBALAJE

Código	Ø	B	C
2.405.221	6	38	17
2.405.223	8	42,5	19
2.405.224	10	42,5	19
2.405.225	12	42,5	19


→ Acoplamiento perfil aleman para manguera/ German profile coupling for hose

BOQUILLA RÁPIDA "A" TUBO PRENSADO CON MUELLE/ AIR FITTING "A" PRESSED TUBE WITH SPRING



2.405.242

5 UNIDAD MINIMA EMBALAJE

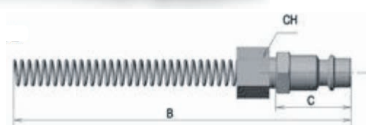

Código	Ø	B	C	D	CH
2.405.242	6x8	127	20	-	13
2.405.243	8x10	128	20	-	15
2.405.244	10x12	127	20	-	17


→ Acoplamiento con muelle tipo alemán para tubo espiral/ German Type Spring Coupling for Spiral Tube

BOQUILLA RÁPIDA "A" MANGUERA PRENSADA/ AIR FITTING "A" CRIMPED HOSE



2.405.260

5 UNIDAD MINIMA EMBALAJE



Código	Ø	B	C	CH
2.405.260	6x14	52	25	17
2.405.264	8x17	55,5	26	20
2.405.265	10x17	56,5	26	20
2.405.266	10x19	56,5	26	22

→ Acoplamiento para válvula de conexión de manguera./ Coupling for hose connection valve.