


FICHA DE PRODUCTO - TECHNICAL SHEET - FEUILLE TECHNIQUE

ENCHUFE RÁPIDO SERIE EXPORT - RACCORD INTERMÉDIAIRE EXPORT SERIES



QUICK COUPLE EXPORT SERIES --- ISO 6150 B

TEMP =	-5°/80°C	Flow-Caudal 6 Bar =	1.500 lts/min
MAX. P =	16 BAR	Tread/Rosca =	Conical ISO 7
FLUIDOS/FLUIDS =	Compressor air	Tread/Rosca =	Cilindrical ISO 228 CLA
VALIDO/VALID=	SERIE ALEMANIA D 7,0 - 7,5 mm		

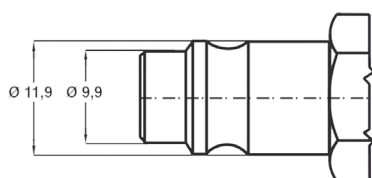


SERIE ALEMANA
GERMANY SERIES

APLICACIONES/ APPLICATIONS


→ La serie EXPORT perfil "A" esta indicada para conexiones de aire comprimido con nivel de exigencia medio, aportando caudales máximos de 1.500lts/min./ The EXPORT series "A" profile is indicated for compressed air connections with a medium demand level, providing maximum flow rates of 1,500lts / min.

ENCHUFE RÁPIDO SERIE EXPORT/ EXPORT SERIES QUICK PLUG

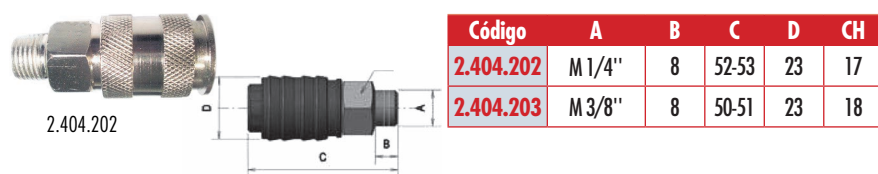

Código	A	B	C	D	CH
2.404.202	M 1/4"	8	52-53	23	17
2.404.203	M 3/8"	8	50-51	23	18

ENCHUFE RÁPIDO SERIE EXPORT/ EXPORT SERIES QUICK PLUG

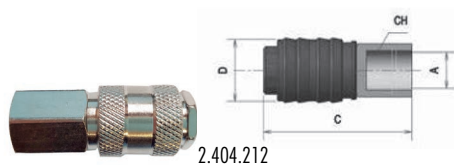

Código	A	B	C	D	CH
2.404.212	H1/4"	-	52-53	23	17
2.404.213	H3/8"	-	52-53	23	19

ENCHUFE RÁPIDO SERIE EXPORT MANGUERA INTERIOR/ QUICK PLUG EXPORT SERIES INNER HOSE



Código	A	B	C	D	CH
2.404.221	6	-	61-62	23	17
2.404.222	8	-	65-66	23	17
2.404.223	10	-	65-66	23	17
2.404.224	12	-	65-66	23	17