


FICHA DE PRODUCTO - TECHNICAL CHARACTERISTICS

LATIGUILLOS/ HOSES

CODIGO : 2.425.---

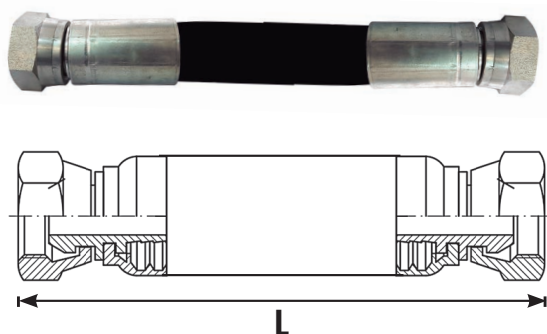

Rosca	Ø Interior(mm)	P. max	Radio(mm)
3/8"	9,5	180	90
1/2"	12,6	160	130
3/4"	19	105	180
1"	25,4	88	230
1.1/4"	31,8	63	250
1.1/2"	38,1	50	300
2"	50,8	40	400



LATIGUILLO 2xTUERCA LOCA PROLONGACIÓN/2x LOCAL NUT WHIP

L= 500 mm	
Código	Rosca
2.425.903	3/8"
2.425.904	1/2"
2.425.905	3/4"
2.425.906	1"
2.425.907	1.1/4"
2.425.908	1.1/2"
2.425.909	2"

L= 1.000 mm	
Código	Rosca
2.425.913	3/8"
2.425.914	1/2"
2.425.915	3/4"
2.425.916	1"
2.425.917	1.1/4"
2.425.918	1.1/2"
2.425.919	2"

L= 1.500 mm	
Código	Rosca
2.425.923	3/8"
2.425.924	1/2"
2.425.925	3/4"
2.425.926	1"
2.425.927	1.1/4"
2.425.928	1.1/2"
2.425.929	2"

L= 2.000 mm	
Código	Rosca
2.425.933	3/8"
2.425.934	1/2"
2.425.935	3/4"
2.425.936	1"
2.425.937	1.1/4"
2.425.938	1.1/2"
2.425.939	2"

L= 3.000 mm	
Código	Rosca
2.425.943	3/8"
2.425.944	1/2"
2.425.945	3/4"
2.425.946	1"
2.425.947	1.1/4"
2.425.948	1.1/2"
2.425.949	2"

APLICACIONES

→ Tubo hidráulico de altas prestaciones extra flexible con una trenza de alambre reforzado que soporta mayor presión que los tubos de un trenzado estándar. Adecuado para media presión y líneas de retorno. Interior resistente hidrocarburos. Exterior, caucho sintético resistente a interperie e hidrocarburos/
Extra flexible high performance hydraulic hose with a reinforced wire braid that supports higher pressure than the tubes of a standard braid. Suitable for medium pressure and return lines. Hydrocarbon resistant interior. Exterior, synthetic rubber resistant to weather and hydrocarbons