




FICHA DE PRODUCTO - TECHNICAL SHEET - FEUILLE TECHNIQUE

Racor Macho - Hembra Giratoria BSP (60°) / Fitting Male - Female Swivel BSP (60°)

Raccord Mâle - Femelle Émerillon BSP (60°)

Code: 2.425.122-129

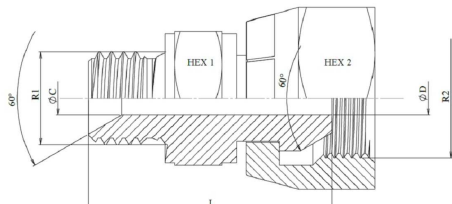

Artículo	R1	R2	HEX 1	HEX 2	ØC	ØD	L
2.425.122	M 1/8" BSP	H 1/4" BSP	14	19	3,5	3,5	25,5
2.425.123	M 1/4" BSP	H 3/8" BSP	19	22	6	6	32,5
2.425.124	M 3/8" BSP	H 1/2" BSP	22	27	8	8	36
2.425.125	M 1/2" BSP	H 3/4" BSP	27	32	11	15	41,5
2.425.126	M 3/4" BSP	H 1" BSP	32	41	16,7	22,2	46,5
2.425.127	M 1" BSP	H 1 1/4" BSP	41	50	22	26	52,5
2.425.128	M 1 1/4" BSP	H 1 1/2" BSP	50	55	28,5	32	57
2.425.129	M 1 1/2" BSP	H 2" BSP	60	70	33	44	61,5

2.425.122 Racor intermedio macho-hembra, tuerca loca 60° 1/4"

2.425.123 Racor intermedio macho-hembra, tuerca loca 60° 3/8"

2.425.124 Racor intermedio macho-hembra, tuerca loca 60° 1/2"

2.425.125 Racor intermedio macho-hembra, tuerca loca 60° 3/4"

2.425.126 Racor intermedio macho-hembra, tuerca loca 60° 1"

2.425.127 Racor intermedio macho-hembra, tuerca loca 60° 1.1/4"

2.425.128 Racor intermedio macho-hembra, tuerca loca 60° 1.1/2"

2.425.129 Racor intermedio macho-hembra, tuerca loca 60° 2"

APLICACIONES-APPLICATIONS-APPLICATIONS:

- Reductor macho con rosca BSP cono 60° - hembra giratoria con rosca BSP cono 60° en acero carbono.

- Male reducer with BSP 60° cone thread - Swivel female with BSP 60° cone thread in carbon steel.

- Réducteur mâle avec filetage conique BSP 60° - Femelle pivotante avec filetage conique BSP 60° en acier au carbone.

OPCIONAL-OPTIONAL-OPTIONNEL:

2.300.330 SELLADOR ROSCAS.

2.326.918 ROLLO TEFLÓN.

DOTACION- INCLUDE -DONATION:

RELACIONADO-RELATED-RELATION: