


FICHA DE PRODUCTO - TECHNICAL SHEET - FEUILLE TECHNIQUE

RACOR INTERMEDIO MACHO BSP- TUERCA LOCA BSP 60°/ INTERMEDIATE MALE FITTING BSP- LOCA NUT BSP 60° / RACCORD MALE INTERMEDIAIRE BSP- ECROU LOCA BSP 60°

Code: 2.425.102-109

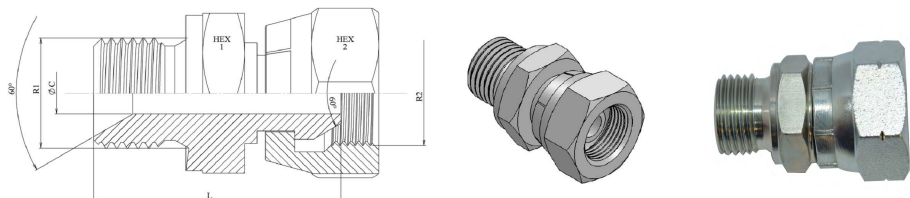

Código	R1	R2	HEX 1	HEX 2	ØC	L
2.425.102	1/4" BSP	1/4" BSP	19	19	4	29,5
2.425.103	3/8" BSP	3/8" BSP	22	22	7	33,5
2.425.104	1/2" BSP	1/2" BSP	27	27	9,5	40,5
2.425.105	3/4" BSP	3/4" BSP	32	32	15	43,5
2.425.106	1" BSP	1" BSP	41	41	22,2	52
2.425.107	1"1/4 BSP	1"1/4 BSP	50	50	26	56
2.425.108	1"1/2 BSP	1"1/2 BSP	55	55	32	61
2.425.109	2" BSP	2" BSP	70	70	46	69

2.425.102 Racor intermedio macho 1/4"

2.425.103 Racor intermedio macho 3/8"

2.425.104 Racor intermedio macho 1/2"

2.425.105 Racor intermedio macho 3/4"

2.425.106 Racor intermedio macho 1"

2.425.107 Racor intermedio macho 1.1/4"

2.425.108 Racor intermedio macho 1.1/2"

2.425.109 Racor intermedio macho 2"

APLICACIONES-APPLICATIONS-APPLICATIONS:

- Adaptador macho con rosca BSP cono 60° - hembra giratoria con rosca BSP cono 60° en acero carbono.

- Male adapter with BSP 60° cone thread - Swivel female with BSP 60° cone thread in carbon steel.

- Adaptateur mâle avec filetage conique BSP 60° - Femelle pivotante avec filetage conique BSP 60° en acier au carbone.

OPCIONAL-OPTIONAL-OPTIONNEL:

2.300.330 SELLADOR ROSCAS.

2.326.918 ROLLO TEFLÓN.

DOTACION- INCLUDE -DONATION:

RELACIONADO-RELATED-RELATION: