


FICHA DE PRODUCTO - TECHNICAL CHARACTERISTICS

RACOR 90° M-M / FITTING 90° M-M

COD: 2.414.101-104



2.414.101

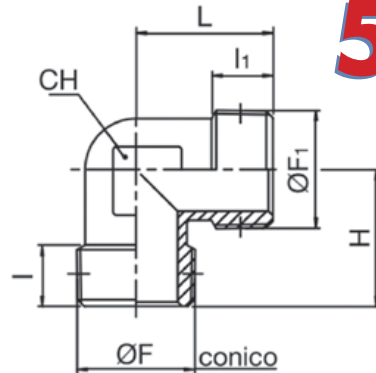

5 UNIDAD
MINIMA
EMBALAJE



| Código | ØF | ØF1 | I | II | H | L |
|-----------|-----|-----|------|------|------|------|
| 2.414.101 | 1/8 | 1/8 | 8 | 8 | 18,5 | 18,5 |
| 2.414.102 | 1/4 | 1/4 | 11 | 11 | 23,5 | 23,5 |
| 2.414.103 | 3/8 | 3/8 | 11,5 | 11,5 | 26 | 26 |
| 2.414.104 | 1/2 | 1/2 | 14 | 14 | 31 | 31 |
| 2.414.105 | 3/4 | 3/4 | 16 | 16 | 33 | 33 |
| 2.414.106 | 1" | 1" | 17 | 17 | 39 | 39 |

2.414.101 EAN: 8434406563746
 2.414.102 EAN: 8434406563753
 2.414.103 EAN: 8434406563777
 2.414.104 EAN: 8434406563760
 2.414.105 EAN: 8434406563784
 2.414.106 EAN: 8434406563791

DESCRIPCION / DESCRIPTION

* Racor roscado a 90°. Se usa para conectar un componente hembra a un tubo de cobre / aluminio en ángulo recto, a través de una tuerca de sellado de 45°.

* 90° threaded fitting. It is used to connect a female component to a copper / aluminum tube at a right angle, through a 45° sealing nut.

OPCIONAL / OPTIONAL:

DOTACION / DELIVERED WITH: