




FICHA DE PRODUCTO - TECHNICAL SHEET - FEUILLE TECHNIQUE

Racor Macho (60°) - Hembra Fija BSP/ Male Fitting (60°) - Fixed Female BSP

Raccord Mâle (60°) - Fixe Femelle BSP

Code: 2.425.152-159

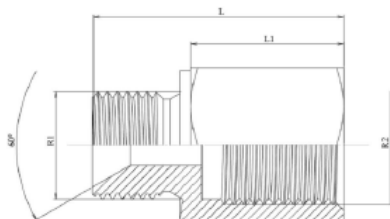

Código	R1	R2	L1	HEX 1	L
2.425.152	1/4" BSP	1/4" BSP	21	19	34
2.425.153	3/8" BSP	3/8" BSP	17	22	31
2.425.154	1/2" BSP	1/2" BSP	23	27	39,5
2.425.155	3/4" BSP	3/4" BSP	26,5	32	45
2.425.156	1" BSP	1" BSP	29	41	50,5
2.425.157	1"1/4 BSP	1"1/4 BSP	28	50	51
2.425.158	1"1/2 BSP	1"1/2 BSP	40	55	65
2.425.159	2" BSP	2" BSP	37	70	65

2.425.152 Racor Macho (60°) - Hembra Fija BSP 1/4"

2.425.153 Racor Macho (60°) - Hembra Fija BSP 3/8".

2.425.154 Racor Macho (60°) - Hembra Fija BSP 1/2".

2.425.155 Racor Macho (60°) - Hembra Fija BSP 3/4".

2.425.156 Racor Macho (60°) - Hembra Fija BSP 1".

2.425.157 Racor Macho (60°) - Hembra Fija BSP 1.1/4".

2.425.158 Racor Macho (60°) - Hembra Fija BSP 1.1/2".

2.425.159 Racor Macho (60°) - Hembra Fija BSP 2".

APLICACIONES-APPLICATIONS-APPLICATIONS:

- Prolongador macho con rosca BSP 60° - hembra fija con rosca BSP en acero al carbono.

- Male extension with BSP 60° thread - fixed female with BSP carbon steel thread.

- Rallonge mâle avec filetage BSP 60° - femelle fixe avec filetage en acier au carbone BSP.

OPCIONAL-OPTIONAL-OPTIONNEL:

2.300.330 SELLADOR ROSCAS.

2.326.918 ROLLO TEFLÓN.

DOTACION- INCLUDE -DONATION:

RELACIONADO-RELATED-RELATION: